

TM12



mainline
PLANT • ACCESS • TRAINING • POWER

SELF-PROPELLED TELESCOPIC MAST LIFT



- Industry-leading self-propelled telescopic mast lift
- Versatile, robust and simple to use
- Drives through a standard doorway
- 0.5m roll-out extension deck
- Ideal for many applications – from construction to stockpicking!

 **snorkel**
www.snorkellifts.com

SELF-PROPELLED TELESCOPIC MAST LIFT

TM12

DIMENSIONS TM12

| | |
|------------------------------|---------------|
| Max. working height | 5.6m |
| Max. platform height (A) | 3.6m |
| Platform size (stowed) | 0.74m x 0.96m |
| Platform size (extended) (E) | 0.74m x 1.46m |
| Extension deck length | 0.5m |
| Overall width (B) | 0.76m |
| Overall length (D) | 1.34m |
| Stowed height (C) | 1.62m |
| Ground clearance | 76mm |

PERFORMANCE

| | |
|--------------------------------------|---|
| Platform capacity (SWL) | 227kg |
| Max. drive height | 3.6m |
| Max. wind speed | 12.5m/s |
| Max. drive speed (stowed) | 3.2km/h |
| Max. drive speed (elevated) | 0.43km/h |
| Raise/lower time | 16/19 sec |
| Gradeability | 25% |
| Max. operating slope (side to side) | 2° |
| Max. operating slope (front to back) | 2° |
| Inside turning radius | 0.36m |
| Outside turning radius | 1.55m |
| Tyres | 279mm. non-marking rubber |
| Parking brake | 2 wheel, spring-applied, hydraulically-released with manual overdrive |
| Drive system | dual front hydraulic motors |
| Controls | proportional |



POWER

| | |
|-----------------|--|
| Power source | 24V 4hp DC electric motor 4-220 Ah batteries |
| Battery charger | 18 amp |

WEIGHT

| | |
|--------|-------|
| Weight | 830kg |
|--------|-------|

TURNING RADIUS

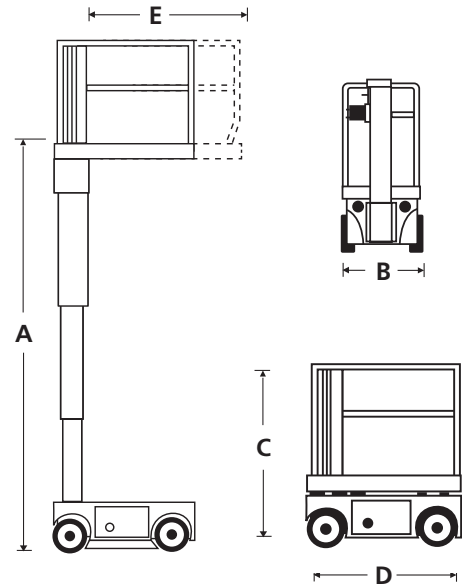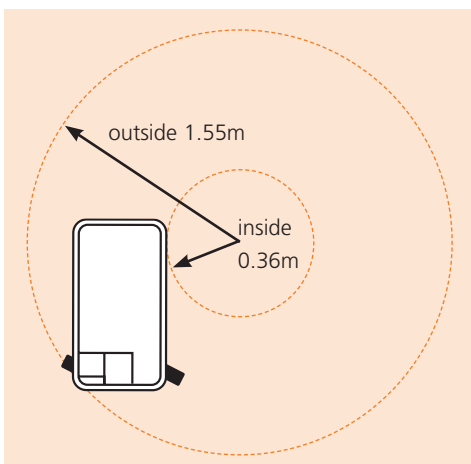

STANDARD FEATURES

- Roll-out deck extension
- Hydraulically powered descent
- Proportional controls
- Saloon-door style entry gates
- Descent and tilt alarms
- Emergency lowering at chassis controls
- Non-marking rubber tyres
- Crane lift points
- Horn
- 2 persons + equipment capacity indoor
- 1 person + equipment capacity outdoor
- Selectable motion alarm
- Integrated battery charger 90V-240V 25A
- Hour meter & on-board diagnostics display
- 2 year parts & labour, 5 year structural warranty
- CE approved

OPTIONS

- Special paint colours
- Environmental hydraulic oil

snorkel

Vigo Centre, Birtley Road,
Washington, Tyne & Wear,
NE38 9DA, U.K.

t: +44 (0) 845 1550 057

e: sales@snorkellifts.com

www.snorkellifts.com