

FUEL STORAGE – TRANSPORTABLE

# TRANSCUBE GLOBAL

499 - 2,980 Litres



GLOBAL SERIES

The TransCube Global is a transportable, environmentally friendly double-walled fuel storage tank, that offers an efficient solution for onsite fuelling and auxiliary supply.

With its fully transportable design and ability to fuel multiple pieces of equipment simultaneously, the TransCube will save you time and double or triple the run times of your equipment.

## FEATURES

### 1. LOCKABLE EQUIPMENT CABINET

Equipment and ports are secure and spills are contained. Secure hose access enables fuelling while cabinet is locked.

### 2. REMOVABLE INNER TANK

For routine cleaning, maintenance and inspection.

### 3. GALVANISED FRAME

Strong, durable and secure structure with added protection from bumps and scratches.

### 4. 110% BUNDED

Built-in, weather proof secondary containment eliminates the need for drip trays.

### 5. CORNER BRACKETS


Liftable by crane and easily stakable: 2 high full and 3 high empty.

### 6. FOUR WAY FORKLIFT POCKETS

Quick and easy manoeuvring and mobility.

### 7. INTERNAL Baffles

Designed to maximise stability when handling the tank full of fuel.

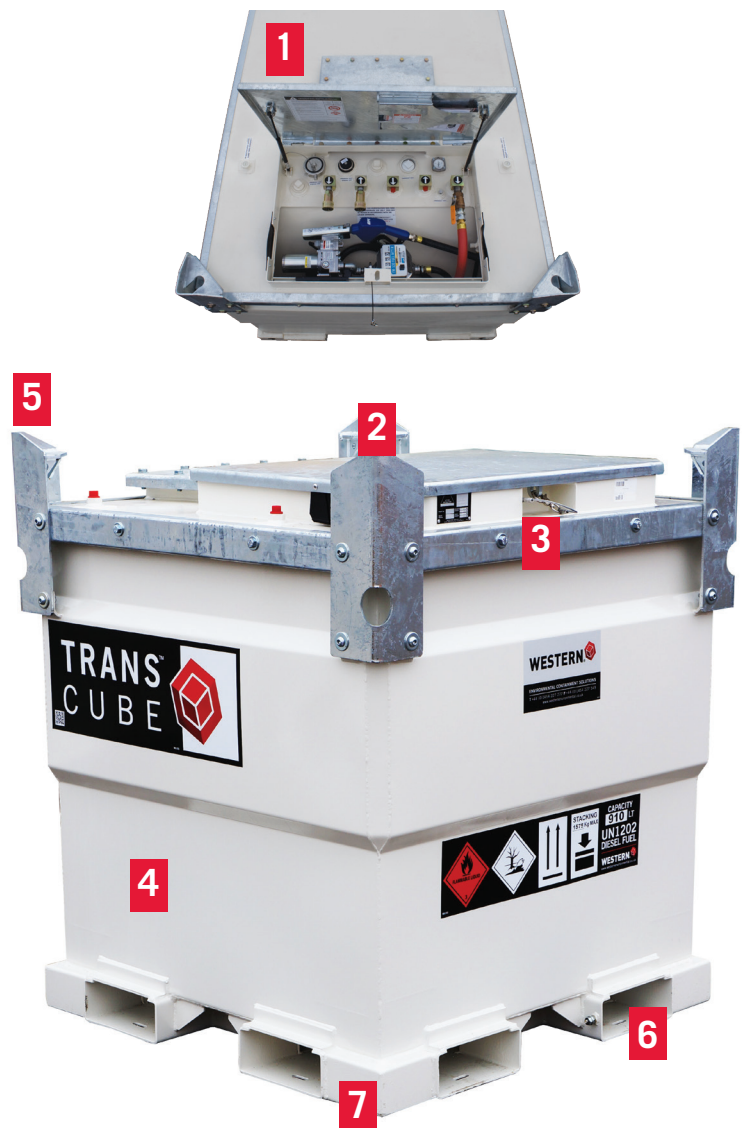





## IDEAL USES & APPLICATIONS

### ONSITE FUEL SUPPLY

Easily refuel machinery on site when needed and cut back on fuel delivery waiting times.





### GENERATOR & AUXILIARY EQUIPMENT

TransCube fuel tanks have the ability to quickly and efficiently connect to 3 diesel powered pieces of equipment and refuel equipment via pump at the same time.

### FUEL TRANSPORT

Meeting multiple worldwide transport regulations, the TransCube can transport fuel safely anywhere you need it.



MODELS AND CAPACITIES				
SPECIFICATIONS	05TCG	10TCG	20TCG	30TCG
<b>CAPACITY</b> (NOMINAL / SAFE FILL (95%))	499/ 474 LITRES	949/ 902 LITRES	2,091/ 1,986 LITRES	2,980/ 2,831 LITRES
<b>DIMENSIONS</b> (L X W X H)	1,150 x 1,150 x 855mm	1,155 x 1,555 x 1,324mm	2,289 x 1,150 x 1,320 mm	2,296 x 1,550 x 1,323 mm
<b>WEIGHT</b> (EMPTY / FULL)	415/889 KG	540/ 1,442 KG	823/ 2,809 KG	1,100/ 3,931 KG
<b>DESIGN APPROVALS</b>	UL142, CAN/ULC-S601, UN DOT TRANSPORT CANADA, ADR, AS-1692 2006, ADG, VLAREM, KIWA	UL142, CAN/ULC-S601, UN DOT TRANSPORT CANADA, ADR, AS-1692 2006, ADG, VLAREM, KIWA	UL142, CAN/ULC-S601, UN DOT TRANSPORT CANADA, ADR, AS-1692 2006, ADG, VLAREM, KIWA	UL142, CAN/ULC-S601, UN DOT TRANSPORT CANADA, ADR, AS- 1692 2006, ADG, VLAREM, KIWA

