

nifty

HR17N SELF PROPELLED ACCESS PLATFORM



17m (56ft)
Working height

9.7m (32ft)
Working Outreach

1.5m Narrow Chassis
Allowing operation in
confined areas

**180° Rotating Cage
with Fly-Boom**
Improving operator access

**ToughCage with SiOPS®
as Standard**
Multi award-winning
operator protection

**Proportional
Multi-Function Control**
Fast & precise operation

**Super-Efficient
Power System**
Maximising battery output to
do more with each charge



niftylift.com



nifty

Heightrider 17N



The new **Height Rider 17N** (HR17N) will lift 2 men and their tools to a working height of 17m or a working outreach of 9.7m. Its practical **180° rotating cage** and fly-boom coupled with fully proportional **multi-function** controls deliver exceptional precision when positioning, making tasks quicker and easier to perform.

An impressive working outreach with **zero tail-swing** helps the HR17N to reach awkward jobs, especially when space is limited, and its **super-efficient** power system allows the batteries to work for longer, so more tasks can be completed and running costs reduced.

The HR17N also incorporates Niftylift's **ToughCage**, and multi award-winning **SiOPS®** safety system which eliminates sustained involuntary operation by instantly stopping machine movement if the operator is pushed onto the control console.

SAFETY FEATURES

- Manual Recovery with Hand Pump
- Automatic Fail-Safe Brakes
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- SiOPS®
- CE Mark
- Tilt Alarm
- Solid Tyres
- Dual Harness Points

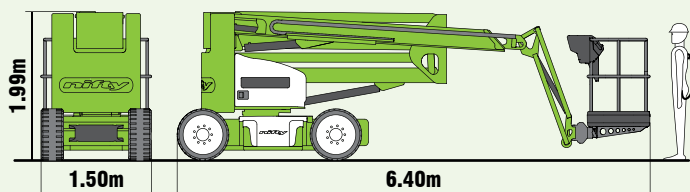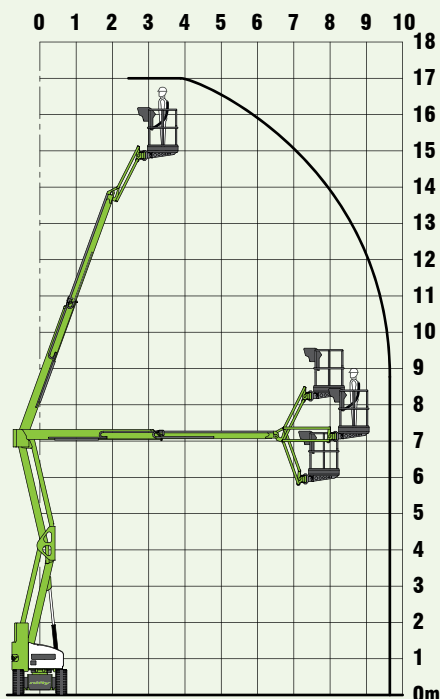

The HR17N's **1.5m width** and **sub 2m height** enables travel through restricted spaces. Optional non-marking tyres mean that it can work both inside and out making it ideal for industrial or maintenance work.

SPECIFICATIONS

Working Height	17m	56ft
Platform Height	15m	49ft 6in
Working Outreach	9.7m	32ft
Slew	360°	
Fly-Boom Arc	150°	
Width	1.5m	4ft 11in
Height	1.99m	6ft 6in
Length - Stowed	5.2m	17ft 1in
- Overall	6.4m	21ft
Minimum Weight	7,400kg*	16,300lbs*
Turning Radius - Outside	3.5m	11ft 6in
Platform Rotation	180°	
Platform Capacity	225kg	500lbs
Platform Size	1.50m x 0.80m	4ft 11in x 2ft 8in
Drive Speed	3.5kph	2.2mph
Gradeability	25% (14°)	
Control System	Proportional Multifunctional	
Power System	Battery Only	

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:



mainline
PLANT · ACCESS · TRAINING · POWER

IS-06

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com
email: info@niftylift.com
Tel.: +44 (0) 1908 223456
Fax.: +44 (0) 1908 312733