

## HA12 CJ / CJ+



### EXCELLENT MANOEUVRABILITY IN THE TIGHTEST SPACES

- > Drive and turntable rotation
- > Tight turning radius
- > Zero tailswing
- > Compact stowed height passes through standard doorways
- > 1.20m width

### OPTIMIZED PRODUCTIVITY

- > Proportional and simultaneous movements
- > Suitable for inside and outside use
- > Long working cycles




# HA12 CJ / CJ+

## ELECTRIC ARTICULATING BOOMS

### TECHNICAL DATA

|                                   | HA12 CJ              | HA12 CJ+         |
|-----------------------------------|----------------------|------------------|
| Working height                    | 11.68 m              |                  |
| Platform height                   | 9.68 m               |                  |
| Horizontal outreach               | 6.94 m               | 7.22 m           |
| Up and over clearance             | 4.74 m               |                  |
| Lift capacity                     | 250 kg (2 pers.)     | 230 kg (2 pers.) |
| <b>A</b> Length                   | 5.36 m               | 5.64 m           |
| <b>B</b> Width                    | 1.2 m                |                  |
| <b>C</b> Height - stowed          | 1.99 m               |                  |
| <b>D</b> Wheelbase                | 1.65 m               |                  |
| <b>E</b> Ground clearance         | 10.7 cm              |                  |
| <b>F</b> x <b>G</b> Platform size | 1.14 x 0.8 m         |                  |
| <b>H</b> Length - transport       | 3.86 m               | 4.2 m            |
| <b>J</b> Height - transport       | 2.22 m               | 2.6 m            |
| Tailswing                         | 0 cm                 |                  |
| Horizontal jib rotation           | N/A                  | 180° [-90/+90]   |
| Vertical jib rotation             | 132.2° [+63.5/-68.7] |                  |
| Platform rotation                 | 180° [+90/-90]       |                  |
| Turntable rotation                | 355 °                |                  |
| Tilt                              | 3°                   |                  |
| Proportional drive speed          | 0.68 - 6 km/h        |                  |
| Maximum wind speed rating         | 45 km/h              |                  |
| Gradeability                      | 25 %                 |                  |
| Turning radius - outside          | 3.65 m               |                  |
| Tyres - non marking               | 598x190              |                  |
| Energy                            | 48 V - 320 Ah (C5)   |                  |
| Weight                            | 7 065 kg             | 7 110 kg         |

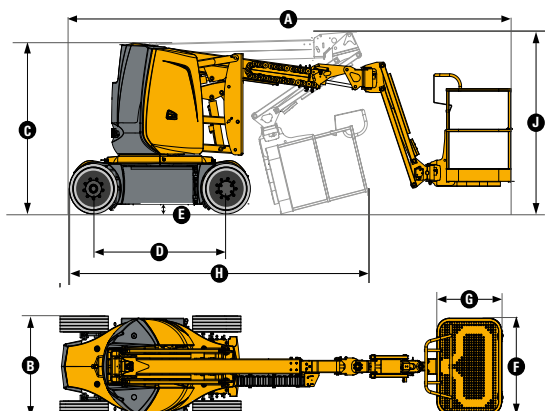

### STANDARD EQUIPMENT

- > 2 wheel drive
- > 2 wheel steer
- > Solid non-marking tyres
- > Ergonomic control panels
- > Mechanical turret slewing lock
- > Automatic platform levelling
- > Load Management System in the platform
- > Tilt sensor
- > Horn
- > Hourmeter
- > Emergency hand pump
- > On board battery charger 48V - 50A
- > Deep cycle batteries
- > Battery charge indicators on both control panels
- > Towing hooks and lifting eyes

### OPTIONS AND ACCESSORIES

- > Electric socket in the platform
- > Air line to platform
- > Self-closing swing door
- > Circuit-breaker
- > Traction batteries
- > Fluorescent tube caddy
- > Telematics ready
- > Orange safety cones holder
- > Flashing light
- > Working light

