


BOMAG

TANDEM VIBRATORY ROLLERS BW 100 AD-4, BW 120 AD-4, BW 125 AD-4

PERFORMANCE DATA

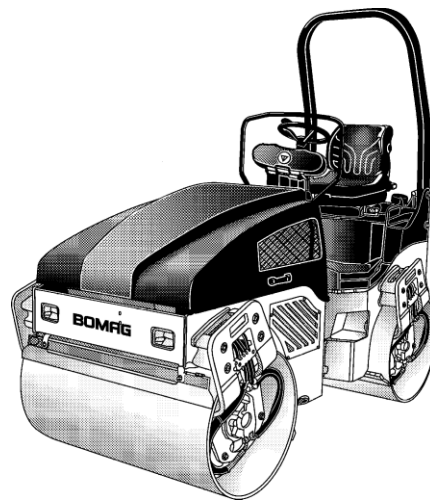

Machine type	Compaction output (m ³ /h) at recommended soil layer thicknesses		
	Gravel, sand	mixed soil	Silt, clay
BW 100 AD-4	80-145	55-105	38-73
BW 120 AD-4	85-170	65-125	43-85
BW 125 AD-4	90-185	70-140	50-95

Machine type	Compaction output (t/h) at different asphalt layer thicknesses		
	2-4 cm	6-8 cm	10-12 cm
BW 100 AD-4	15-40	40-60	60-100
BW 120 AD-4	20-45	40-70	70-120
BW 125 AD-4	25-50	45-80	75-130

BOMAG

Technical Data

Shipping dimensions in m3

	without ROPS	with ROPS
BW 100 AD-4	4,784	6,618
BW 120 AD-4	5,673	7,848
BW 125 AD-4	5,673	7,848


Standard Equipment

- Oscillating artic. center joint
- 2 scrapers per drum
- Suspended operator's platform
- Plastic water tank
- Hour meter
- Lockable engine cover
- Lockable anti vandal dashboard protection
- Transport lashing and lifting points front/rear
- Emergency stop button
- Vibration cut-off, rear drum
- Back-up alarm
- Water level
- Gravity water sprinkler system

Optional Equipment

- * ROPS with safety belts
- * Working lights front/rear
- * Seat with contact switch
- Edge cutter
- Indicator and hazard lights
- Rotary beacon
- Biodegradable hydraulic oil
- Special paint
- Tool kit
- Double travel lever (Sliding seat)
- Foldable ROPS
- Laterally sliding seat
- Fuel level indicator
- Single point lifting device
- Pressure sprinkler system
- Electronic Engine Immobilizer
- Weather protection cabin
- Battery disconnect switch
- Document bag
- Sun roof
- Flow divider

* Standard delivery with CE conformity (valid within European Union)

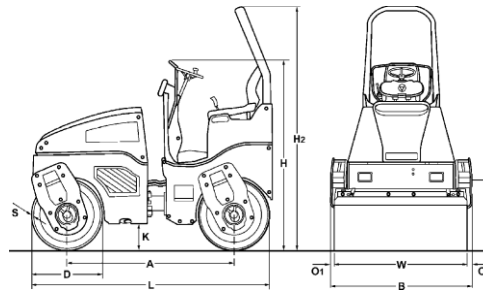

Dimensions in mm

	A	B	C	D	H	H2	K	L	O	S	W
BW 100 AD-4	1728	1076	475	700	1800	2490	250	2470	38	13	1000
BW 120 AD-4	1728	1276	475	700	1800	2490	250	2470	38	13	1200
BW 125 AD-4	1728	1276	475	700	1800	2490	250	2470	38	22	1200

Technical Data

	BOMAG BW 100 AD-4	BOMAG BW 120 AD-4	BOMAG BW 125 AD-4
--	----------------------	----------------------	----------------------

Weights

Operating weight w. ROPS CECE	kg	2.400	2.600	3.150
Average axle load CECE	kg	1.180	1.300	1.550
Average static linear load CECE	kg/cm	11,8	10,8	12,9

Dimensions

Length with ROPS	mm	2.470	2.470	2.470
Track radius, inner	mm	2.720	2.620	2.620

Driving Characteristics

Max. working speed with vibration	km/h	0- 6,5	0- 6,5	0- 6,5
Max. travel speed	km/h	0- 12,0	0- 12,0	0- 12,0
Max. gradeability without/with vibr.	%	40/30	40/30	40/30

Drive

Engine manufacturer	Kubota	Kubota	Kubota	
Type	D 1703 MDI	D 1703 MDI	D 1703 MDI	
Cooling	water	water	water	
Number of cylinders	3	3	3	
Performance ISO 9249	kW	25,2	25,2	25,2
Speed	min-1	2.600	2.600	2.600
Performance SAE J 1349	kW	25,2	25,2	25,2
Speed	min-1	2.600	2.600	2.600
Speed adjustment 1	min-1	2.200	2.200	2.200
Speed adjustment 2	min-1	2.700	2.700	2.700
Electric equipment.....	V	12	12	12

Brakes

Service brake	hydrost.	hydrost.	hydrost.
Parking brake	hydropneum.	hydropneum.	hydropneum.

Steering

Steering system	oscil.artic.	oscil.artic.	oscil.artic.
Steering method	hydrost.	hydrost.	hydrost.
Steering angle +/-	grad	30	30
Oscillating angle +/-	grad	12	12

Exciter system

Vibrating drum	front + rear	front + rear	front + rear
Drive system	hydrost.	hydrost.	hydrost.
Frequency	Hz	60/70	50/60
Amplitude	mm	0,50	0,40
Centrifugal force	kN	23/38	29/42

Sprinkler System

Type of sprinkling	gravity	gravity	gravity
--------------------------	---------	---------	---------

Capacities

Fuel	l	40	40	40
Water	l	220	220	220

Technical modifications reserved. Machines may be shown with options.



BOMAG
Hellerwald
D-56154 Boppard
P.O. Box 5162
Tel. (0)6742 - 1000
Fax (0)6742 - 3090
Fax (0)6742 - 3090

BOMAG